

Difference in S-Curve for Different Types of Construction Projects

*Ehab Soliman and Khaled Alrasheed**

Kuwait University, Civil Engineering Department, Safat 17269, Kuwait

**Corresponding author: k.alrasheed@ku.edu.kwa*

ABSTRACT

Project cash flow and contractor S-curve are tools that can be used to measure, control and anticipate project progress. Few studies dedicated to evaluate and judge the behaviour of the original S-curve. This study aims to evaluate the similarities and changes of construction projects S curves between different project types. More than 40 S-curves were collected from the state of Kuwait for different types of construction projects. The list of collected curves divided into six groups based on the type of client, no of buildings and number of floors. Statistical analysis used to compare the curves inside each group of projects. Statistical analysis using test of normality, T-paired test then Standard Euclidean Distance were applied to evaluate the similarity and changes between groups. This study revealed that there is a level of similarity of S-curves for high rise buildings and there is no similarity of S-curves for one or multi-building projects. The maximum gap between S-curves for one and high rise building laying in the middle part of project duration, while the maximum gap between S-curves for multi-building project laying in 70% to 80% of project duration. This study revealed that the variance of S-curve behaviour indicating there is no common attitude for all types of construction project types. This study can help construction stakeholders to anticipate their expected expenses and help in project cash flow management.

Keywords: S curve – contractor cash out – comparison – construction projects

INTRODUCTION:

One of the most important success factor for the construction project is to finish the project in a specific time and within the pre-determined budget. S-curve is the cumulative contractor cash out that representing the contractor planned project incurred cost during the project life. This s-curve is a very powerful tool for project control. During the project life, the S-curve is used as a base for time and budget comparison. S-curve is prepared based on the project schedule and the contracted prices for project items. There are many studies focused on the mathematical bases for forming the project S-curve. In this study, we will study the differences between S-curve for different types of construction projects. This study will focus on the projects in the state of Kuwait as case studies.

In many cases such as in the Authority of Public Housing Affairs in Kuwait, to accept a contractor cash flow, it should achieve a certain percentage of cumulative S curve in a definite period for the project. These values are fixed for all types of construction project types. In this study, the S-curves for many types of projects will be analysed to identifying the level of similarity or differences in S-curves between different types of construction projects.

OBJECTIVE

This study aims to identify the similarities and differences of S-curve between different types of construction projects. The study aims also to investigate the S curve behaviour for different types of construction projects.

METHODOLOGY

Figure 1 shows the study methodology. A literature review for studies that conducted to describe the purpose of S-curve and how it can be generated. Collecting some of S-curves for different types of construction projects conducted in the last ten years in

Kuwait. The collected list of S-curves is divided into six types of projects based on the type of client, the number of buildings and floors. To unite the process of comparison, the collected S-curves are converted to identify the scheduled value of work for every 10% of project times. Then, comparing the S-curve for each group of project type. The average of S-curve for each group is calculated and statistically analysed. To compare the means of average S-curves for each group, the test normality and T-paired test is applied. Standard Euclidean distance is used to test the similarity of the resulted S-curves form different types of construction projects.

BACKGROUND

Money is the most important resource in construction activity and control project financial is an important issue for all project stakeholders. Money has the great rule to project day to day execution (**Dhamodaran, Divakar 2019**). Cash flow management is the main role of project financial control. The cash flow management is considered the main indicator of a business's financial health and implying proper cash flow management is crucial to the construction business survival (Shash and Qarra, 2018). Estimate project budgeting and monitoring the budget by ensuring effective cost control system to keep continuous control on project financial is a major role of all project management objectives (Banki and Esmaili 2009). Halpin and Senior (2009) indicated that forecasting cash behaviour over a project's duration is a crucial key for controlling project cash effectively. Project Cash flow is the difference between cash spent and cash received during a specific period (Tarek & Yaqiong, 2014). Project cash flow analysis is necessary to eliminate or to minimize the possibility of financial failure (Kenley, 2003).

Ikediashi and Okolie 2020 surveyed the risk elements that affect the contractor's cash flow through a survey in Nigeria. The study indicated that the 5 top-rated risk

factors affecting contractor's cash flow were 'delay in payment by client', 'delay in delivery of materials', contractor's lack of resources, exchange rate, and inflation.

The cash flow consists of two parts; the cash out which indicates the contractor cumulative costs versus the cash in which represents the periodic payments that contractor can receive from the owner. It is assumed that the profile of the cumulative contractor cost versus elapsed time on projects takes the shape of an S-curve (Mavrotas et al 2005). The cost flow curve can be simulated accurately based on anticipated monthly cost values. The cost values are used to fit the S curve, a process that can be used to update all the monthly cost values for a project contract (Hwee and Tiong, 2002). Normally, the S-curve starts flat then accelerating after that due to work progress. The reason is that projects start slowly when the resources necessarily need to set up, and then projects start to accelerate once all resources have been acquired (Kaka, 1999).

S-curves have become a necessary tool for project planning and control and progress evaluation during the execution phase. S-curves can be used for several purposes, as a target against which the actual progress of the project can be evaluated at any point in time to monitor whether the project is on schedule (Cheng et al, 2011). The S-curve is developed based on early and late progress activities in two envelope curves. The upper curve corresponds to the curve of project activities earliest times, while the lower curve corresponds to the curve of the latest times. The S-curve envelope is used to measure the efficiency of project progress. If the actual project progress laying within between the upper and lower curves for S-curve envelope, it means that the project has a good chance to finish within predefined time boundaries, otherwise it might be ahead or behind the project schedule (Cristóbal 2017). It is noted that S-curves provide a simple and handy tool with which project managers can control their

projects. S-curve results during project duration can be used to forecast the likely duration of the project, and to manage cash flow, current performance status, future necessary cost/duration, etc., for running projects (Barraza et al 2000).

The quality of prepared S-curve makes contractors more prepared to deal with project real encounters. Non-realistic cash flow forecasting is the main cause of financial failure for contractors (Navon R, 1996). To enhance usage of S-curve as a tool for project performance judgement, it is recommended to integrate it with other project management approaches, such as milestone planning (Murmis, 1997).

In this study S-curves for different types of construction projects are gathered from the state of Kuwait. Kuwait is one of the Arabic Gulf area. Kuwait GDP is about 137.9 Billion Kuwaiti Dinar (CBK, 2018) (Kuwait Dinar is about 3.3 \$). The construction contribution to GDP is about 7% (Kuwait-CSB 2019)

The Kuwait construction industry is characterised by highly economic changes. Multi-national work trades are working in Kuwait construction industry. There are technical personnel came from many countries all over the world. Many of international consulting and contracting firms are working in many of major Kuwaiti projects (Mahdi and Soliman, 2019)

The usual awarding and procurement system in Kuwait is the (Lowest Tender Price) via the Central Authority for Public Tenders (CAPT). The traditional method is using a designer for design stage and award the tender for the bidder with the lowest price. The design documents should be prepared before the project start. Many public and private projects are using also CM (Construction Management) contracts, especially for big projects.

DISCUSSION AND ANALYSIS

Data gathering and sampling:

A set of approved contractor S-curves for many projects in Kuwait is gathered for the period from 2009-2019. Approving contractor S curves is a part of contractor planning and schedule process. The process of project plan approval is going indefinite sequential steps. First, the master project schedule is approved, then the detailed project tasks planning and schedule program is approved. To get approval of detailed project tasks planning and schedule program, it takes many of revision cycles from all project stakeholders such as owner, engineers and public authorities. The used project S-curve is the last approval step of contractor planning and schedule process. The approved S curve is used as a tool for project time and cost control.

This set of approved contractor S curves was chosen based on the availability and acceptance of stakeholder to use their project cash flow. The set of projects varies from governmental and private projects. Some of these cash flow was excluded because of mistakes of production or missing data that cannot be used. The set of projects is divided into two groups based on owner type as governmental or private owner. Each set of project of clients is then divided into three types of projects; one building project, multi-building projects and one high rise building project. The group of one building project contains the projects of one building of one or two floors. This type of projects contains small villas, mosques, bank branches, service building and car-parks. Multi-building projects contains the project of more than one building of a small number of floors. This group contains central hospitals, sports clubs, commercial malls and educational buildings. The high rise building contains ministries headquarters, office and residential buildings. In spite of these projects are different slightly in internal finishing quality, they have common features such as they

are common structural and electro-mechanical systems. Table 1 shows the numbers and summary of surveyed projects divided into six groups of projects.

Table 1: number of the surveyed projects

type of project	project owner – number of projects		total	duration range		Budget Range	
	governmental	private		min (days)	max (days)	KD* (min)	KD* (Max.)
one building project	8	7	15	279	730	334,793	5,400,000
multi-building projects	9	5	14	239	1642	337,000	220,689,359
multi floors buildings – high rise	6	13	19	419	1337	850,000	76,794,999
total	48						

*KD = 3.33 US\$

S-Curves for different types of construction projects

Figures 1 and 2 show the behaviour for S-curves for different types of construction projects. Figure 1 shows the S curves for private owning projects. For one building projects, it is noticed that the attitude of the projects S-curve is almost straight and almost identical for all projects up to 10% of the project life. The percentage of cumulative cost is almost 4% at 10% of project duration. In this early project stage, there is only some arrangement tasks are executed. The tasks that are executed in this stage are activities related to earthwork and concrete substructure. These activities in

general consume less expenses compared to the rest of the project activities. The attitude of curves then stating to be different. This is because starting other activities such as superstructure, finishing and electromechanical activities. These activities and their costs varying based on owner desires. In average, 25% of incurred cost are with 50% of project time.

Regarding private owning multi buildings projects, it is shown that from project start the attitude of S-curve is different for all projects. This behaviour has resulted from the change of characteristics for each project and different numbers of buildings per each project.

Regarding the S curves private owning high rise buildings, it is shown that most of the surveyed projects in the first 10% of the project is very similar. The gap between curves differing after starting stage. The average S-curve for this type of projects is almost smooth. Figure 2 shows the S-curves for governmental owning different types of projects. Regarding one building for governmental projects, the behaviour of S-curve is almost identical up to 15% of project life then starting to widening after that. The attitude of all surveyed projects is almost similar with almost parallel curves. As noticed that the average curve indicating that about 85% of project time consumes almost 70% of estimate project cash out. It indicating that the rest of 15% of project time needs 30% of project estimate cost. This is due to that the electromechanical systems and cladding works in this stage. These activities consume a high percentage of project estimate cost.

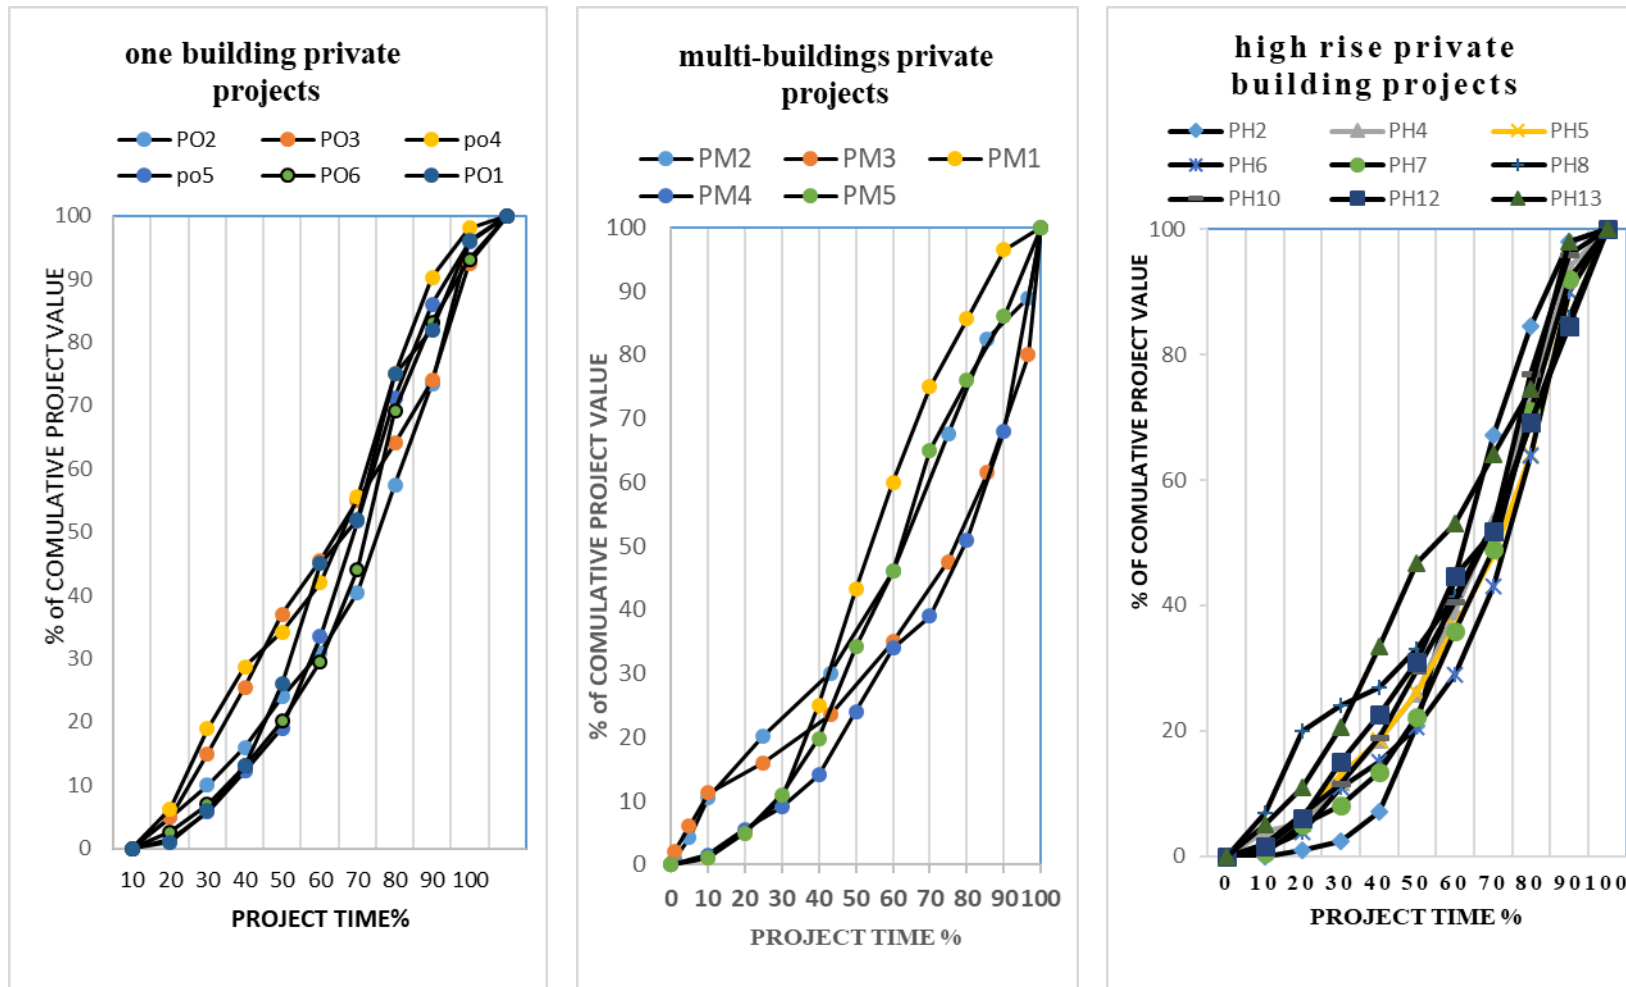


Figure 1 S Curves for Private Projects for Different Types of Project

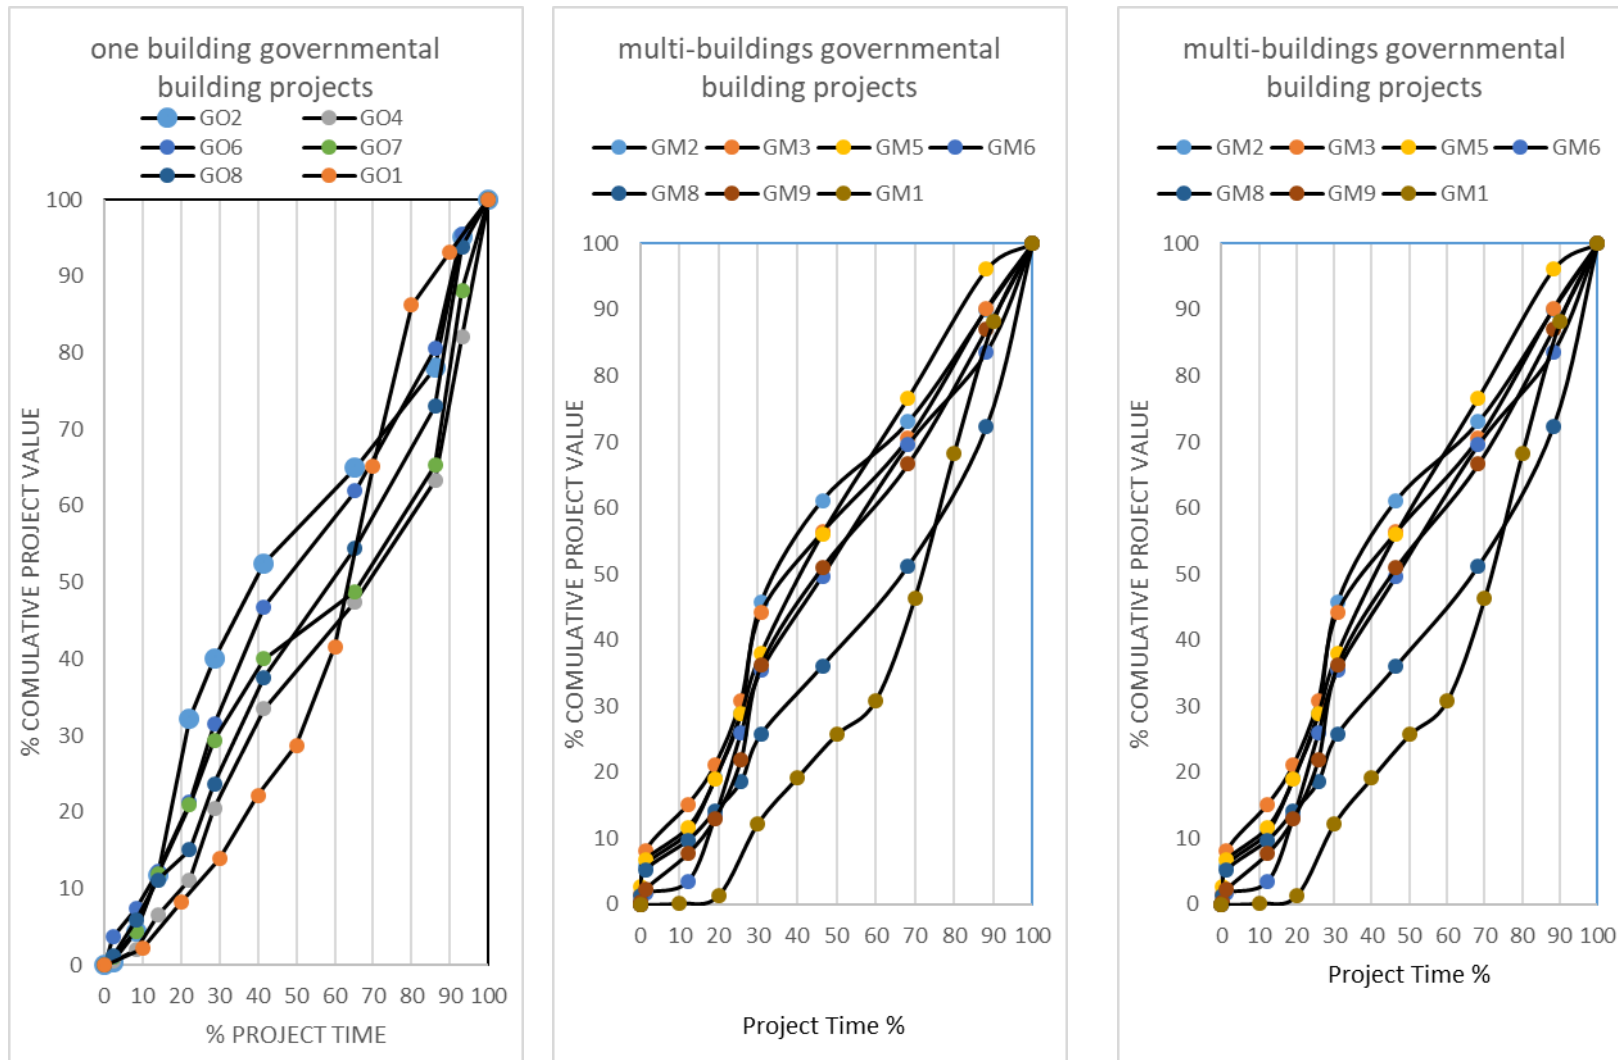


Figure 2 S Curves for Governmental Projects for Different Types of Project

Regarding the S-curves for governmental multi buildings project, it is shown that there is no similarity for curve attitude for this type of project. There is a big difference for the curves from project start. This difference of project attitude resulted from changes of project components and changing of project number of buildings. this type of project gives more freedom to the contractor to maintain their cash flow policy. While, the S-curves for high rise building of governmental projects, there is a similarity of curves attitude through project life for the surveyed project of this type of project.

S-curves Gaping analysis for different types of construction projects

In this section, a gap analysis for the S-curves attitude for each one of the surveyed six groups. The gap difference for each type of surveyed project is calculated as the gap between the maximum and minimum value of each type of project for the different surveyed projects groups. Gap value is calculated at a certain time by subtracting the minimum percentage of cost estimate from the maximum percentage at the same time period. The chosen time period is for every 10% of project duration. Figure 3 describes the difference for values for S-curves for different types of construction projects. As shown in Figure 8, the maximum difference between the upper and lower curves for one building for private owning projects is about 26.3% which existed in the middle stage of project (40-50%) of project life. For the projects of private owning for multi-building projects, the maximum difference for the mentioned S-curve is about 36% in 70-80% of the project duration. The project of high rise private owning projects has the maximum difference in S-curve values which is about 24 to 26% for the middle part of the project life from 40-70% of the project lifetime. For the governmental one building projects, the maximum difference is laying in two parts; one in the middle part of the project of value of 21.1% in 40%

of the project life. The other part in the last third of the project about 22.9% on the 80% of project life. While, for multi buildings project of governmental projects, there is a big gap between surveyed projects in the last third of the project about 25% difference in 70-80% of the project life. The high rise governmental projects have a gradual difference of surveyed S-curves up to 60% of the project life. The maximum difference in this type of projects is 17.9% on 60% of project lifetime. The maximum gap between S-curves for different types of project. This gap varies between 17% to 36% and the maximum gap lies between 40% to 80% of project life. These differences due to changing of project types.

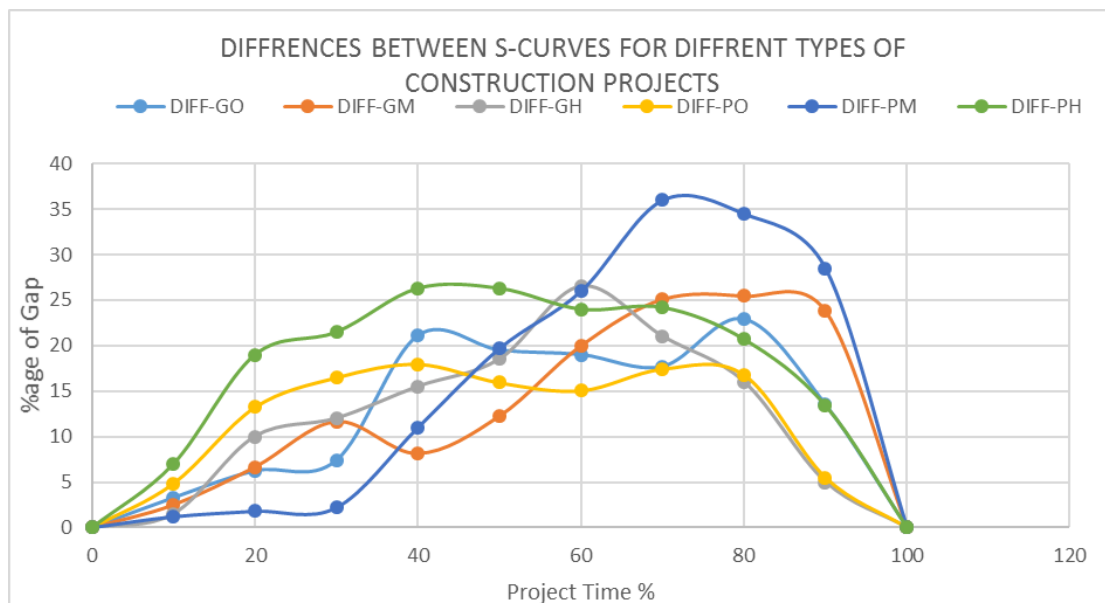


Figure 3: Gap differences of S-curves for different types of construction projects

Comparing Curves for Averages for The Project Types Groups:

To investigate the differences or similarities between cash flow for the surveyed different types of projects, the averages of each type will be used. The average represents the behaviour of the set of projects for each type of projects.

Figure 4 shows the averages for S-curves for the different types of construction projects. As shown in Figure 4, the lower average is for governmental multi-building projects, while the upper average is for the private owning one building projects. For

the first third of the project lifetime, the behaviour of the averages is almost the same for private and governmental multi and high rise building projects. For the second third and up to 80% of project life, the attitude of the average S-curves for the governmental one, high rise building, private multi and high rise buildings projects is almost identical. The variance of S-curve behaviour indicating that there is no common attitude for all types of construction project types

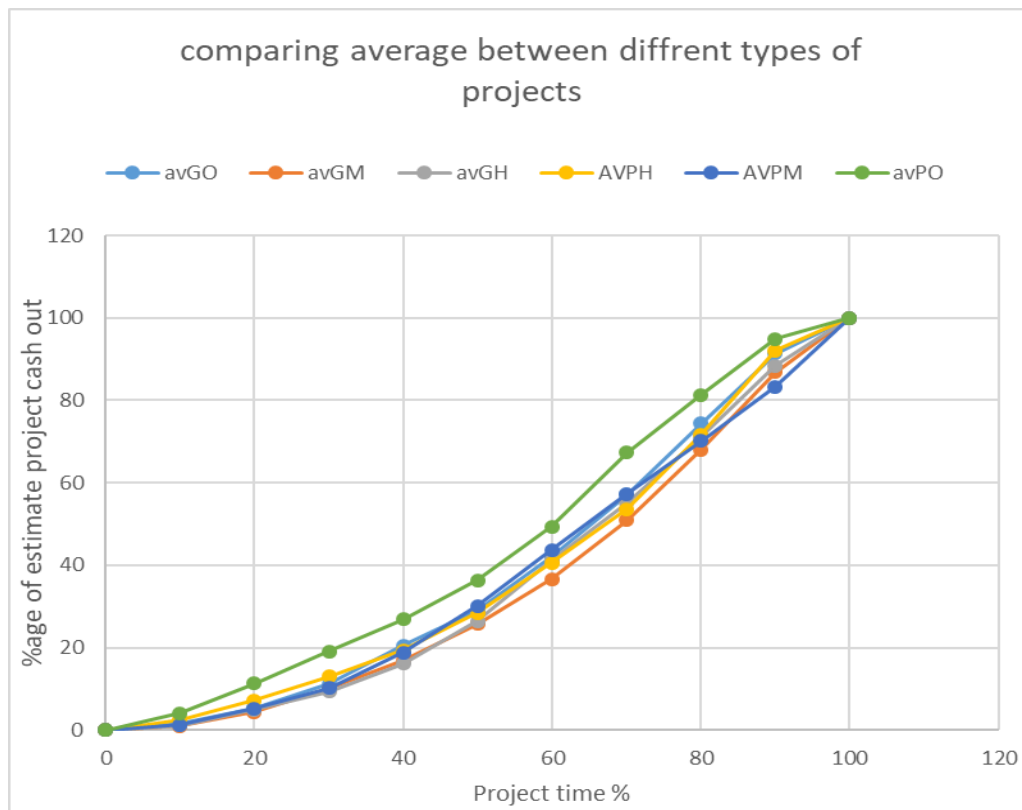


Figure 4 Comparing between cash flow average between the project types

Statistical analysis for averages of different types of construction projects

To test the similarity or differences for the different types of surveyed construction projects, statistical analysis is applied. Average values for the different types of construction projects are statistically analysed to investigate the level of similarity or difference. Two statistical analysis are implied, T-paired test and the Standard Euclidean distance. T-paired test is applied for comparing means values between surveyed project types groups and Standard Euclidean distance is applied for

measuring the similarity between S-curves values for the different types of surveyed projects.

The T-paired test is applied only for normal distributed samples, so before applying T-paired test, a test of normality should be applied.

Test of normality

As shown in Table 2, all Kolmogorov-Smirnov significant values are more than 0.05 which indicates that the samples are in normal distribution and the sample can be compared by T-paired test.

Table 2: Test of Normality Significance values – SPSS 26

	PRGGROPS	Kolmogorov-Smirnov			Shapiro-Wilk		
		Statistic	df	Sig.	Statistic	df	Sig.
	PO	.157	11	.200*	.899	11	.182
	PM	.164	11	.200*	.894	11	.156
	PH	.178	11	.200*	.893	11	.150
	GO	.162	11	.200*	.900	11	.184
	GM	.164	11	.200*	.912	11	.257
	GH	.141	11	.200*	.919	11	.313
*. This is a lower bound of the true significance.							
a. Lilliefors Significance Correction							

PO= private one building projects, PM= private multi-building projects, PH= private high rise building projects, GO= governmental one building projects, GM = governmental multi-building projects GH= governmental high rise building projects

T- paired test

To evaluate the impact of similarity between two patterns of S-curves for the different types of surveyed project, T-paired test is applied. The T-paired test is used to compare the means between two different groups of normal distribution samples. Student's t-Test is used to ascertain if the null hypothesis can be accepted or rejected. The null hypothesis is accepted if the two means for the two different groups are the same.

Alternative hypothesis if the two means are not the same. From the paired two-samples results, if the significance level is bigger than 0.05 then reject the null hypothesis and accept alternative hypothesis and if the significance level is less than 0.05 then accept the null hypothesis.

Table 3 shows the paired samples statics between each two different types of surveyed groups. Most of T-paired sample test are significantly less than 5% which indicates that the hypothesis of same mean values is rejected and there is a statistical significant difference between surveyed project types means.

Standard Euclidean distance

Standard Euclidean distance is a value that can be used to measure the near or widening of two different curves. The smallest the standard Euclidean distance the similarity of two curves. The Euclidean distance is calculated based on the absolute difference value between two points at the same percentage of project lifetime. As shown in Table 4 the closest curves are between governmental high rise building and governmental one building. While, the biggest gap is between government multi-building projects and one building private owning projects S-curves. As shown in Table 4, the S-curve for all types of construction projects for governmental projects are nearly close.

Table 3: T-paired sample test values

Paired Samples Test								
	Paired Differences							
				95% Confidence Interval of the Difference				
				Lower	Upper			
GO - GM	2.9052381	2.4822016	.7484119	1.2376724	4.5728038	3.882	10	.003
GO - GH	1.6712121	1.4573435	.4394056	.6921554	2.6502688	3.803	10	.003
GO - PH	.3536364	1.7431321	.5255741	-.8174157	1.5246884	.673	10	.516
GO - PM	1.1112121	2.7576920	.8314754	-.7414306	2.9638548	1.336	10	.211
GO - PO	-5.2933333	3.3235345	1.0020834	-7.5261142	-3.0605525	-5.282	10	.000
GM - GH	-1.2340260	1.9570732	.5900798	-2.5488056	.0807537	-2.091	10	.063
GM - PH	-2.5516017	1.5763198	.4752783	-3.6105878	-1.4926157	-5.369	10	.000
GM - PM	-1.7940260	3.0870858	.9307914	-3.8679585	.2799065	-1.927	10	.083
GM - PO	-8.1985714	5.3537403	1.6142134	-11.7952631	-4.6018797	-5.079	10	.000
GH - PH	-1.3175758	1.8280275	.5511710	-2.5456613	-.0894902	-2.391	10	.038
GH - PM	-.5600000	2.3571964	.7107215	-2.1435861	1.0235861	-.788	10	.449
GH - PO	-6.9645455	4.2831572	1.2914205	-9.8420096	-4.0870813	-5.393	10	.000
PH - PM	.7575758	3.3576999	1.0123846	-1.4981577	3.0133092	.748	10	.472
PH - PO	-5.6469697	4.3892514	1.3234091	-8.5957089	-2.6982305	-4.267	10	.002
PM - PO	-6.4045455	4.1056330	1.2378949	-9.1627472	-3.6463437	-5.174	10	.000

The Standard Euclidean distance are (7.2084, 7.4194, 12.4281) for one and high rise buildings projects, multi-building and high rise building projects, and between one and multi-building projects respectively. While, for private owning these values are (23.3115, 10.9112, 24.8950) indicating that the behaviour of S-curves in private owning project is more independent that for governmental projects. Then, comparing Standard Euclidean distance for each type of project. For high rise building, the distance value between the private and governmental building is (7.2466), which indicates that there is high similarity for the S curves for this type of projects with no interfering of owner type. For multi buildings projects, the value is (11.4326) this indicates that there is moderate similarity with this type of projects. Regarding the one building project, the value of standard Euclidean distance is (20.4615). This value indicates that the similarity of S-curve for this type of project is low. This result is ascertained by calculating the correlation coefficient between the groups of project surveyed. Table 5 shows the correlation coefficient for the surveyed groups. The maximum correlation factor is (0.999) and significantly correlated between groups of (GM, PH, GH, GM, GO), while the least correlation is between ((Po and GM).

Table 4: *Standard Euclidean distance for different types of projects' S-curves*

	GO	GM	GH	PO	PM	PH
GO	0.0000	12.4281	7.2084	20.4615	9.4674	5.6357
GM		0.0000	7.4197	32.0314	11.4326	9.8217
GH			0.0000	26.7770	7.6820	7.2466
PO				0.0000	24.8950	23.3115
PM					0.0000	10.9112
PH						0.0000

Table 5: *correlation coefficient for different types of projects' S-curves*

		Correlations					
		GO	GM	GH	PH	PM	PO
Pearson Correlation		1	.998**	.999**	.999**	.998**	.996**
Sig. (2-tailed)			.000	.000	.000	.000	.000
N		11	11	11	11	11	11
Pearson Correlation		.998**	1	.999**	.999**	.996**	.989**
Sig. (2-tailed)		.000		.000	.000	.000	.000
N		11	11	11	11	11	11
Pearson Correlation		.999**	.999**	1	.999**	.998**	.993**
Sig. (2-tailed)		.000	.000		.000	.000	.000
N		11	11	11	11	11	11
Pearson Correlation		.999**	.999**	.999**	1	.996**	.993**
Sig. (2-tailed)		.000	.000	.000		.000	.000
N		11	11	11	11	11	11
Pearson Correlation		.998**	.996**	.998**	.996**	1	.994**
Sig. (2-tailed)		.000	.000	.000	.000		.000
N		11	11	11	11	11	11
Pearson Correlation		.996**	.989**	.993**	.993**	.994**	1
Sig. (2-tailed)		.000	.000	.000	.000	.000	
N		11	11	11	11	11	11

** . Correlation is significant at the 0.01 level (2-tailed).

LIMITATION AND FUTURE RESEARCH WORK

This study results are limited to the similar construction industries such as Kuwait construction industry. The future works will study the modelling of the behaviour of contractors' cash flow for different types of construction projects in mathematical modelling.

CONCLUSION

This study aimed to analyse the differences and similarities of contractor S-curves for different types of construction projects. Number of contractor S-curves were collected from the state of Kuwait. This list of project is divided into six groups of project types. Statistical analysis tools are used to test the similarities and changes between these group of projects using test of normality, T-paired test and standard Euclidean

distance. The S-curves for the projects of high rise building and one building projects groups have a certain degree of similarity, while the S-curves for multi-building projects are different from project start. The maximum gap between the surveyed S-curves are laying in the middle part of project duration in high rise building, while it located in 75% of project duration for multi-building projects. For project groups average S-curves, the lower average is for governmental multi-building projects, while the upper average is for the private owning one building projects. Standard Euclidean Distance is used to measure the similarity of groups S-curves. Standard Euclidean Distance showed that closest curves are between private high rise building and governmental one building. While, the biggest gap is between government multi-building projects and one building private owning projects S-curves. The S-curves for governmental projects for different types have a degree of similarity, while this is not true for private projects. The S-curves for high rise building for both types of clients are similar. The research results can be used to indicating that the S-curves have different behaviour based on changing of project type and project clients.

References:

- Banki, M. T., and Esmaeili, B. 2009. The effects of variability of the mathematical equations and project categorizations on forecasting S-curves at construction industry. *International Journal of Civil Engineering* 7(4): 258-270.
- Barraza, G.A., Back, W.E., Mata, F. 2000. Probabilistic monitoring of project performance using S-curves. *Journal of Construction Engineering Management ASCE*. 126 (2): 142-8
- Cheng, Y.M., Yu, C.H., Wang, H.T. 2011. Short-Interval dynamic forecasting for actual S-curve in the construction phase. *Journal of Construction Engineering and Management ASCE*. 137 (11) :933-41.
- Cristóbal, J R S 2017. The S-curve envelope as a tool for monitoring and control of projects. *Procedia Computer Science* 121: 756–761.
- Dhamodaran,G. and Divakar, K.R. 2019. Estimation of cash flow from value of work done for construction projects in India. *International Journal of Engineering and Advanced Technology (IJEAT) ISSN: 2S2 (8) : 433-437*
- Dubem I. Ikediashi, D. I. & Kevin C. Okolie, K. C. 2020. An assessment of risks associated with contractor’s cash flow projections in South-Nigeria. *International Journal of Construction Management*, DOI: 10.1080/15623599.2020.1764752
- Halpin, D. W., & Senior, B. 2009. *Financial management and accounting fundamentals for construction*. Hoboken, NJ: John Wiley & Sons
- Hwee, N. G. and Tiong, R. L. 2002. Model on cash flow forecasting and risk analysis for contracting firms. *International Journal of Project Management*, 20 (5): 351-363
- Kaka, A.P. 1999. The development of a benchmark model that uses historical data for monitoring the progress of current construction projects. *Engineering, Construction and Architectural Management*. 6 (3):256-66.
- Kenley, R. 2003. *Financing construction*. London, England: Spon Press.
- Kuwait CSB – Central Statistical Bureau 2019.
https://www.csb.gov.kw/Pages/Statistics_en?ID=69&ParentCatID=%203
- Mahdi, I. & Soliman, E. 2018. Significant and top-ranked delay factors in Arabic Gulf countries, *International Journal of Construction Management*, DOI: [10.1080/15623599.2018.1512029](https://doi.org/10.1080/15623599.2018.1512029)
- Mavrotas, G., Caloghirou, Y., Koune, J. 2005. A model on cash flow forecasting and early warning for multi-project programmes: application to the operational program

for the information society in Greece. *International Journal of Project Management*. 23 (2):121-3

Murmis, GM. 1997. S curves for monitoring project progress. *Project Manage J* 1997: 29–35.

Navon, R. 1996. Company-Level cash-flow management. *Journal of Construction Engineering and Management*. 122 (1): 22- 29

Shash, A. A. &Qarra, A. A. 2018. Cash Flow Management of Construction Projects in Saudi Arabia. *Project Management Journal*. 49(5): 48-63;

Tarek, Z., & Yaqiong, L. 2014. Cash flow modelling for construction projects. *Engineering, Construction and Architectural Management*. 21(2): 170–189.